

2022 DODGE DURANGO
PERFORMANCE FEATURES GUIDE


SRT
Favorites
Recent
Categories
All
Activate Services
Alexa
AM Radio
Analytic-sConsent
App
Assist
Audio
Audio/

TABLE OF CONTENTS

1 INTRODUCTION 3
2 GETTING TO KNOW YOUR INSTRUMENT PANEL 6
3 STARTING AND OPERATING 11
4 MULTIMEDIA 17
5 SAFETY 30
6 IN CASE OF EMERGENCY 32
7 SERVICING AND MAINTENANCE 33
8 TECHNICAL SPECIFICATIONS 41
9 INDEX 45

INTRODUCTION

SYMBOLS KEY....4
SYMBOL GLOSSARY....4

GETTING TO KNOW YOUR INSTRUMENT PANEL

SRT INSTRUMENT CLUSTER....6
SRT Instrument Cluster Descriptions....7
INSTRUMENT CLUSTER DISPLAY....7
Location And Controls....8
Instrument Cluster Display Menu Items....8
WARNING LIGHTS AND MESSAGES....10
Green Indicator Lights....10
White Indicator Lights....10

STARTING AND OPERATING

ENGINE BREAK-IN RECOMMENDATIONS....11
AUTOMATIC TRANSMISSION....11
Fuel Economy (ECO) Mode....12
SELEC-TRACK — IF EQUIPPED....13
Custom....13
Active Damping System....13
Launch Control....14
Torque Reserve— If Equipped....15
FUEL SAVER TECHNOLOGY — IF EQUIPPED....16
TRAILER TOWING....16
Trailer Towing Weights (Maximum Trailer Weight Ratings) — SRT....16
RECREATIONAL TOWING (BEHIND MOTORHOME)....16
Towing This Vehicle Behind Another Vehicle....16

MULTIMEDIA

PERFORMANCE PAGES....17
Timers....17
Gauges....19
Dynamometer (Dyno)/Engine....19
G-Force....20
Vehicle Dynamics....21
SRT DRIVE MODES — IF EQUIPPED....21
Sport Mode....21
Track Mode....22
Tow Mode....22
Snow Mode....22
Auto Mode....23
Eco Mode....23
Custom Mode....24
Race Options....26
Guidelines For Track Use....28

SAFETY

SAFETY FEATURES....30
Electronic Brake Control (EBC) System....30
SAFETY TIPS....31
Periodic Safety Checks You Should Make Outside The Vehicle....31

IN CASE OF EMERGENCY

JACKING AND TIRE CHANGING....32
Run Flat Tires....32
TOWING A DISABLED VEHICLE....32

SERVICING AND MAINTENANCE

SCHEDULED SERVICING — SRT....33
Maintenance Plan....34
ENGINE COMPARTMENT....38
6.4L Engine....38
Pressure Washing....39
VEHICLE MAINTENANCE....39
Engine Oil....39
Engine Oil Filter....40

TECHNICAL SPECIFICATIONS

BRAKE SYSTEM....41
WHEEL AND TIRE TORQUE SPECIFICATIONS....41
Torque Specifications....41
FUEL REQUIREMENTS....42
6.4L Engine....42
FLUID CAPACITIES....42
ENGINE FLUIDS AND LUBRICANTS....43
CHASSIS FLUIDS AND LUBRICANTS....43

INTRODUCTION

Dear Customer,

This SRT Supplement has been prepared with the assistance of service and engineering specialists to acquaint you with the operation and maintenance of your vehicle. Within this information, you will find a description of the SRT services that FCA US LLC offers to its customers. Please take the time to read all of this publication carefully before driving your vehicle for the first time. Following the instructions, recommendations, tips, and important warnings in this manual will help ensure safe and enjoyable operation of your vehicle. After you have read the booklet, it should be stored in the vehicle for convenient reference and remain with the vehicle when sold. For additional information, refer to your vehicle's Owner's Manual.

When it comes to service, remember that authorized dealers know your Dodge best, have factory-trained technicians, genuine Mopar® parts, and care about your satisfaction.

SYMBOLS KEY

WARNING!	These statements are against operating procedures that could result in a collision, bodily injury and/or death.
CAUTION!	These statements are against procedures that could result in damage to your vehicle.
NOTE:	A suggestion which will improve installation, operation, and reliability. If not followed, may result in damage.
TIP:	General ideas/solutions/suggestions on easier use of the product or functionality.
PAGE REFERENCE ARROW 	Follow this reference for additional information on a particular feature.
FOOTNOTE 	Supplementary and relevant information pertaining to the topic.

If you do not read the entire Owner's Manual, you may miss important information. Observe all Cautions and Warnings.

SYMBOL GLOSSARY

Some car components have colored labels with symbols indicating precautions to be observed when using this component. It is important to follow all warnings when operating your vehicle. See below for the definition of each symbol ⇨ page 10.

NOTE:
Warning and Indicator lights are different based upon equipment options and current vehicle status. Some telltales are optional and may not appear.

Green Indicator Lights	
	ECO Mode Indicator Light (SRT) ⇨ page 10
	Snow Mode Indicator Light ⇨ page 10
	Sport Mode Indicator Light ⇨ page 10
	Tow Mode Indicator Light ⇨ page 10
	Track Mode Indicator Light ⇨ page 10

White Indicator Lights	
CUSTOM	Custom Mode SRT Indicator Light ➪ page 10
55	SRT Speed Warning Indicator Light ➪ page 10

White Indicator Lights	
Valet	Valet Mode SRT Indicator Light ➪ page 10

GETTING TO KNOW YOUR INSTRUMENT PANEL

SRT INSTRUMENT CLUSTER



SRT Instrument Cluster Descriptions

1. Speedometer
   - Indicates vehicle speed.
2. Tachometer
   - Indicates the engine speed in revolutions per minute (RPM x 1000).
3. Temperature Gauge
   - The temperature gauge shows engine coolant temperature. Any reading within 203°F - 230°F (95°C - 110°C) indicates that the engine cooling system is operating satisfactorily.
   - The pointer will likely indicate a higher temperature when driving in hot weather, up mountain grades, or when towing a trailer. It should not be allowed to exceed the upper limits of the normal operating range.

WARNING!

A hot engine cooling system is dangerous. You or others could be badly burned by steam or boiling coolant. You may want to call an authorized dealer for service if your vehicle overheats.

CAUTION!

Driving with a hot engine cooling system could damage your vehicle. If the temperature gauge reads greater than 230°F (110°C) pull over and stop the vehicle. Idle the vehicle with the air conditioner turned off until the pointer drops back into the normal range. If the pointer remains above 230°F (110°C), turn the engine off immediately and call an authorized dealer for service.

4. Instrument Cluster Display
   - The instrument cluster display features a driver interactive display ➪ page 7.
5. Fuel Gauge
   - The pointer shows the level of fuel in the fuel tank when the Keyless Push Button Ignition is in the ON/RUN position.



   - The fuel pump symbol points to the side of the vehicle where the fuel door is located.

NOTE:
The hard telltales will illuminate for a bulb check when the ignition is first cycled.

INSTRUMENT CLUSTER DISPLAY

Your vehicle is equipped with an instrument cluster display, which offers useful information to the driver. With the ignition in the OFF mode, opening/closing of a door will activate the display for viewing, and display the total miles, or kilometers, in the odometer. Your instrument cluster display is designed to display important information about your vehicle's systems and features. Using a driver interactive display located on the instrument panel, your instrument cluster display can show how systems are working and give you warnings when they are not. The steering wheel mounted controls allow you to scroll through the main menus and submenus. You can access the specific information you want and make selections and adjustments.

Location And Controls

The instrument cluster display is located in the center of the instrument cluster.



6.4L SRT Instrument Cluster Display/Controls Location

1 – Instrument Cluster Display Controls
2 – Instrument Cluster Display Screen

The Main Menu items consists of the following:

- Main Gauge
- Vehicle Info
- Performance — If Equipped
- Diagnostics — If Equipped
- Speed Warning — If Equipped

Instrument Cluster Display Menu Items

The instrument cluster display can be used to view the main menu items for several features. Use the **up** △ and **down** ▽ arrow buttons to scroll through the driver interactive display menu options until the desired menu is reached.

NOTE:
Depending on the vehicle's options, feature settings may vary.

Main Gauge

SRT

Push and release the **up** △ or **down** ▽ arrow button until the main gauge menu icon is displayed in the instrument cluster display. Push and release the **left** ◁ or **right** ▷ arrow buttons to change between large and small speedometer display. Push and release the **OK** button to toggle units (mph or km/h) of the speedometer.

Vehicle Info

Push and release the **up** △ or **down** ▽ arrow button until the Vehicle Info icon/title is highlighted in the instrument cluster display. Push the **left** ◁ or **right** ▷ arrow button to scroll through the information submenus.

Battery Voltage

- Displays the current voltage level of the battery.
  - Storage Mode (SRT) — If Equipped
    - Through this option, the vehicle can be placed into Storage Mode.

Intake Air Temp (SRT) — If Equipped

- Displays the current temperature of the air entering the engine.

Engine Torque (SRT) — If Equipped

- Displays the current engine torque.

Engine Power (SRT) — If Equipped

- Displays the current engine power.

Performance Features — If Equipped

Push and release the **up** △ or **down** ▽ arrow button until the SRT icon/title is highlighted in the instrument cluster display. Push and release the **left** ◁ or **right** ▷ arrow button to scroll through the performance feature submenus.

WARNING!

Measurement of vehicle statistics with the Performance Features is intended for off-highway or track use only and should not be done on any public roadways. It is recommended that these features be used in a controlled environment and within the limits of the law. The capabilities of the vehicle as measured by the performance pages must never be exploited in a reckless or dangerous manner, which can jeopardize the user's safety or the safety of others. Only a safe, attentive, and skillful driver can prevent accidents.

The Performance Features include the following:

- 0-60 mph (0-100 km/h) Timer
  - Best
  - Last
  - Recent
- 0-100 mph (0-160 km/h) Timer
  - Best
  - Last
  - Recent
- 0-60 feet (20 meters) Timer
  - Best
  - Last
  - Recent
  - Reaction Time — If Selected
- 1/8 Mile (200 meters) Timer
  - Best
  - Last
  - Recent
  - Reaction Time — If Selected
- 1/4 Mile (400 meters) Timer
  - Best
  - Last
  - Recent
  - Reaction Time — If Selected
- Braking Distance
  - Distance
  - From Speed
- Current G-Forces
- Peak G-Forces
- Lap Timer
- Lap History
  - Will list the last four laps with the best lap highlighted in green.
- Top Speed

Screen Setup

Push and release the **up** △ or **down** ▽ arrow button until the Screen Setup Menu icon/title is highlighted in the instrument cluster display. Push and release the **OK** button to enter the submenus and follow the prompts on the screen as needed. The Screen Setup feature allows you to change what information is displayed in the instrument cluster as well as the location that information is displayed.

Screen Setup Driver Selectable Items

Favorite Menus

- Main Gauge
- Vehicle Info
- Performance (Show/Hide)

NOTE:

Menus with (show/hide) can push the **OK** button to choose whether to show or hide this menu on the instrument cluster display.

Diagnostics — If Equipped

Push and release the **up** △ or **down** ▽ arrow button until the Diagnostics icon/title is highlighted in the instrument cluster display. Push and release the **OK** button to display the diagnostic trouble codes and descriptions. When the end of the list is reached, "No Diagnostic Codes at this Time" will appear in the instrument cluster display.

Speed Warning — SRT

Push and release the **up** △ or **down** ▽ arrow button until the Speed Warning Menu icon/title is displayed in the instrument cluster display. Push and release **OK** to enter speed warning. Use the **up** △ or **down** ▽ arrow button to select a desired speed, then push and release **OK** to set the speed. The white passive speed limiter telltale will light up with a notification text message (Speed Warning Set to XX, followed by the selected speed units). When the set speed is exceeded, an audible chime will sound until the speed is no longer exceeded. The white passive speed limiter telltale will turn yellow and will flash, and a pop-up message of "Speed Warning Exceeded" will display.

NOTE:
You can turn the Speed Warning off by using the **up** △ /**down** ▽ arrow button to scroll through speed list and select **OFF** at the bottom of the list.

WARNING LIGHTS AND MESSAGES

The warning/indicator lights will illuminate in the instrument panel together with a dedicated message and/or acoustic signal when applicable. These indications are indicative and precautionary and as such must not be considered as exhaustive and/or alternative to the information contained in the Owner's Manual, which you are advised to read carefully in all cases. Always refer to the information in this chapter in the event of a failure indication. All active telltales will display first if applicable. The system check menu may appear different based upon equipment options and current vehicle status. Some telltales are optional and may not appear.

GREEN INDICATOR LIGHTS

ECO Mode Indicator Light (SRT) — If Equipped



This light will turn on when ECO mode is active ➪ page 23.

Snow Mode Indicator Light — If Equipped



This light will turn on when Snow Mode is active ➪ page 22.

Sport Mode Indicator Light — If Equipped



This light will turn on when Sport Mode is active ➪ page 21.

Tow Mode Indicator Light — If Equipped



This light will turn on when Tow Mode is active ➪ page 22.

Track Mode Indicator Light — If Equipped



This light will turn on when Track Mode is active ➪ page 22.

WHITE INDICATOR LIGHTS

Custom Mode SRT Indicator Light



This light will turn on when Custom Mode SRT is active ➪ page 24.

SRT Speed Warning Indicator Light — If Equipped



When Set Speed Warning is turned on, the speed warning telltale will illuminate in the instrument cluster with a number matching the set speed. When the set speed is exceeded, the indication will light up yellow and flash along with a continuous chime. Speed Warning can be turned on and off in the instrument cluster display.

The number "55" is only an example of a speed that can be set and can range from 20mph to 155 mph. Speed Warning can be increased or decreased in one mph increments.

Valet Mode SRT Indicator Light



This light will turn on when Valet Mode is active.

ENGINE BREAK-IN RECOMMENDATIONS

The following tips will be helpful in obtaining optimum performance and maximum durability for your new SRT vehicle.

This break-in occurs mainly during the first 500 miles (805 km) and continues through the first oil change interval.

It is recommended that the operator observe the following driving behaviors during the new vehicle break-in period:

0 to 100 miles (0 to 161 km):

- Do not allow the engine to operate at idle for an extended period of time.
- Press the accelerator pedal slowly and no more than halfway to avoid rapid acceleration.
- Avoid aggressive braking.
- Drive with the engine speed below 3,500 RPM.
- Maintain vehicle speed below 55 mph (88 km/h) and observe local speed limits.

100 to 300 miles (161 to 483 km):

- Press the accelerator pedal slowly and no more than halfway to avoid rapid acceleration in lower gears (FIRST to THIRD gears).
- Avoid aggressive braking.
- Drive with the engine speed below 5,000 RPM.
- Maintain vehicle speed below 70 mph (112 km/h) and observe local speed limits.

300 to 500 miles (483 to 805 km):

- Exercise the full engine RPM range, shifting manually (paddles or gear shift) at higher RPM when possible.
- Do not perform sustained operation with the accelerator pedal at wide open throttle.
- Maintain vehicle speed below 85 mph (136 km/h) and observe local speed limits.

For the first 1,500 miles (2,414 km):

- Do not participate in track events, sport driving schools, or similar activities.

NOTE:
Check engine oil with every refueling and add if necessary. Oil and fuel consumption may be higher through the first oil change interval. Running the engine with an oil level below the add mark can cause severe engine damage.

AUTOMATIC TRANSMISSION

You must press and hold the brake pedal while shifting out of PARK.

WARNING!

- Never use the PARK (P) position as a substitute for the parking brake. Always apply the parking brake fully when exiting the vehicle to guard against vehicle movement and possible injury or damage.
- Your vehicle could move and injure you and others if it is not in PARK. Check by trying to move the transmission gear selector out of PARK with the brake pedal released. Make sure the transmission is in PARK before exiting the vehicle.

(Continued)

WARNING!

- The transmission may not engage PARK if the vehicle is moving. Always bring the vehicle to a complete stop before shifting to PARK, and verify that the transmission gear position indicator solidly indicates PARK without blinking. Ensure that the vehicle is completely stopped, and the PARK position is properly indicated, before exiting the vehicle.
- It is dangerous to shift out of PARK or NEUTRAL (N) if the engine speed is higher than idle speed. If your foot is not firmly pressing the brake pedal, the vehicle could accelerate quickly forward or in reverse. You could lose control of the vehicle and hit someone or something. Only shift into gear when the engine is idling normally and your foot is firmly pressing the brake pedal.
- Unintended movement of a vehicle could injure those in or near the vehicle. As with all vehicles, you should never exit a vehicle while the engine is running. Before exiting a vehicle, always come to a complete stop, then apply the parking brake, shift the transmission into PARK, and turn the ignition OFF. When the ignition is in the OFF position, the transmission is locked in PARK, securing the vehicle against unwanted movement.

(Continued)

WARNING!

- When exiting the vehicle, always make sure the ignition is in the OFF position, remove the key fob from the vehicle, and lock the vehicle.
- Never leave children alone in a vehicle, or with access to an unlocked vehicle. Allowing children to be in a vehicle unattended is dangerous for a number of reasons. A child or others could be seriously or fatally injured. Children should be warned not to touch the parking brake, brake pedal or the transmission gear selector.
- Do not leave the key fob in or near the vehicle (or in a location accessible to children), and do not leave the ignition in the ACC or ON/RUN position. A child could operate power windows, other controls, or move the vehicle.

CAUTION!

Damage to the transmission may occur if the following precautions are not observed:

- Shift into or out of PARK or REVERSE (R) only after the vehicle has come to a complete stop.
- Do not shift between PARK, REVERSE, NEUTRAL, or DRIVE (D) when the engine is above idle speed.

(Continued)

CAUTION!

- Before shifting into any gear, make sure your foot is firmly pressing the brake pedal.

FUEL ECONOMY (ECO) MODE

The Fuel Economy (ECO) mode can improve the vehicle's overall fuel economy during normal driving conditions. Push the ECO button in the center stack of the instrument panel to activate or disable ECO mode. ECO mode can also be enabled or disabled through your Uconnect system.

When the Fuel Economy (ECO) mode is enabled, the vehicle control systems will change the following:

- The transmission will upshift sooner and downshift later.
- The transmission will launch (from a stop) in SECOND gear.
- The overall driving performance will be more conservative.
- Some ECO mode functions may be temporarily inhibited based on temperature and other factors.

SELEC-TRACK — IF EQUIPPED

Description

Selec-Track combines the capabilities of the vehicle control systems, along with driver input, to provide the best performance for all terrains.

Push the SRT button and the available drive modes will show up on the radio touchscreen.



Selec-Track Buttons

1 — SRT
2 — LAUNCH

Refer to the Drive Modes for further information ⇨ page 21.

Selec-Track consists of the following positions:

- **SPORT** – Dry weather, on-road calibration. Performance-based tuning that provides a Rear-Wheel Drive feel but with improved handling and acceleration over a Two-Wheel Drive vehicle. This feature will reset to AUTO upon an ignition cycle.
- **SNOW** – Tuning set for additional stability in inclement weather. Use on and off-road on loose traction surfaces such as snow. This feature will reset to AUTO upon an ignition cycle.
- **AUTO** – Fully automatic full-time Four-Wheel Drive operation can be used on and off-road. Balances traction with seamless steering feel to provide improved handling and acceleration over Two-Wheel Drive vehicles.
- **TRACK** – Track road calibration for use on high-traction surfaces. Driveline is maximized for traction. Some binding may be felt on less forgiving surfaces. This feature will reset to AUTO upon an ignition cycle.
- **TOW** – Use this mode for towing and hauling heavy loads. Vehicle suspension will go to SPORT mode. Trailer Sway Control (TSC) is enabled in the ESC system. This feature will reset to AUTO upon an ignition cycle.

CUSTOM

Pushing the SRT button twice will put the vehicle into Custom mode. This will allow the driver to create a custom vehicle configuration that is saved for quick selection of favorite settings. The system will return to AUTO mode when the ignition switch is cycled from RUN to OFF to RUN, if this mode is selected. While in Custom mode the Stability, Transmission, Steering, Suspension, All-Wheel Drive set up, and Paddle shifter settings may be configured through the Custom mode set-up. Refer to Drive Modes for further information ⇨ page 21.

ACTIVE DAMPING SYSTEM

This vehicle is equipped with an electronically controlled damping system. This system reduces body roll and pitch in many driving situations including cornering, acceleration and braking. There are three modes:

- **Street Mode** (Available in terrain positions AUTO, SNOW and CUSTOM) — Used during highway speeds where a touring suspension feel is desired.
- **Sport Mode** (Available in terrain positions AUTO, SPORT, CUSTOM and TOW) — Provides a firm suspension for better handling.
- **Track Mode** (Available in terrain positions AUTO, TRACK and CUSTOM) — Provides a full firm suspension for an aggressive track experience.

Refer to Drive Modes for further information ⇨ page 21.

LAUNCH CONTROL

This vehicle is equipped with a Launch Control system that is designed to allow the driver to achieve maximum vehicle acceleration in a straight line. Launch Control is a form of traction control that manages tire slip while launching the vehicle. This feature is intended for use during race events on a closed course where consistent quarter-mile and 0-to-60 times are desired. The system is not intended to compensate for lack of driver experience or familiarity with the race track. Use of this feature in low traction (cold, wet, gravel, etc.) conditions may result in excess wheel slip outside this system's control resulting in an aborted launch.

Preconditions:

- Launch Control should not be used on public roads. Always check track conditions and the surrounding area.
- Launch Control is not available within the first 500 miles (805 km) of engine break-in.
- Launch Control should only be used when the engine and transmission are at operating temperature.
- Launch Control is intended to be used on dry, paved road surfaces only.

CAUTION!
Use on slippery or loose surfaces may cause damage to vehicle components and is not recommended.

Launch Control is only available when the following procedure is followed:

NOTE:
Pushing the LAUNCH button on the instrument panel will access Launch Control features. Please refer to the Drive Mode Supplement for further information.

LAUNCH Button

1. Press the Launch RPM Set-Up button on the instrument cluster display. This screen will allow you to adjust your launch RPM for optimum launch/traction.
2. Push the LAUNCH button on the instrument panel.
3. Press the Activate Launch Control button on the instrument cluster display and follow the instructions.
   - Make sure the vehicle is not moving
   - Put vehicle in FIRST gear or DRIVE (D)
   - Steering wheel must be pointing straight
   - Vehicle must be on level ground
   - Apply brake pressure
   - While holding the brake, rapidly apply and hold the accelerator pedal to wide open throttle. The engine speed will hold at the RPM that was set in the Launch RPM Set-up screen

NOTE:
Messages will appear in the instrument cluster display to inform the driver if one or more of the above conditions have not been met.

4. When the above conditions have been met, the instrument cluster display will read "Release Brake".
5. Keep the vehicle pointed straight.

Launch Control will be active until the vehicle reaches 62 mph (100 km/h), at which point the Electronic Stability Control (ESC) system will return to its current ESC mode.

Launch Control will abort before launch completion and display a "Launch Aborted" message in the instrument cluster when any of the following occur:

- The accelerator pedal is released during launch.
- The ESC system detects that the vehicle is no longer moving in a straight line.
- The ESC OFF button is pressed to change the system to another mode.

CAUTION!
Do not attempt to shift when the drive wheels are spinning and do not have traction. Damage to the transmission may occur.

TORQUE RESERVE— IF EQUIPPED

Torque Reserve is automatically enabled in Brake Torque Launch and Launch Control to reduce the time required for the intake manifold to fill with air. Torque Reserve provides greater engine airflow than is otherwise required, stops fuel flow to multiple cylinders and retards spark as necessary to hold torque from the airflow in reserve. As soon as the driver launches the car, fuel flow is restored and spark is advanced to instantaneously deliver the reserve torque. For a given launch engine speed, additional torque is delivered more quickly than is possible with manual control.

In Brake Torque Launch, the magnitude of reserve produced depends on the driver's accelerator pedal position. In Launch Control, the reserve magnitude depends on the engine launch RPM selected in the Race Options menu.

Due to the way the engine is controlled during Torque Reserve, a distinct exhaust note is generated and engine vibration increases.

Brake Torque Launch with Torque Reserve

This vehicle is equipped with a Brake Torque Launch with Torque Reserve that is designed to allow the driver to achieve maximum vehicle acceleration in a straight line. This feature is intended for use during race events on a closed course where consistent quarter-mile (time) and 0-to-60 (time) are desired. The Brake Torque Launch with Torque Reserve feature is designed to allow the driver to launch the vehicle with the benefit of Torque Reserve, while maintaining control of the engine speed during staging and the profile of the torque delivered when launching. This feature is intended for use during race events on a closed course when additional launch torque is desired. The system is not intended to compensate for lack of driver experience or familiarity with the race track. Use of this feature in low traction (cold, wet, gravel, etc.) conditions may result in excess wheel slip outside this system control resulting in an aborted launch.

Initial Conditions:

- Make sure the vehicle is not moving
- Put vehicle in FIRST or DRIVE
- Steering wheel must be centered with tires pointing forward
- Vehicle must be on level ground
- Vehicle at normal operating conditions
- Launch Mode not active
- Drive mode switch is in AUTO, SPORT, TRACK or CUSTOM
  - In Custom mode, the All-Wheel Drive mode must not be 50/50
- Apply adequate brake pressure with left foot
- Apply a steady throttle with the right foot to achieve a desired engine speed above 1,350 RPM
- To launch, remove left foot from brake pedal while maintaining or increasing throttle to launch with right foot

NOTE:
Brake Torque Launch will abort if the engine speed drops below 1,000 RPM, throttle is released or 10 seconds have elapsed while in Torque Reserve. Brake Torque Launch is not recommended within the first 500 miles (805 km) of engine break-in.

CAUTION!
Do not attempt to shift when the drive wheels are spinning and do not have traction. Damage to the transmission may occur.

FUEL SAVER TECHNOLOGY — IF EQUIPPED

This feature offers improved fuel economy by shutting off four of the engine's eight cylinders during light load and cruise conditions. The system is automatic with no driver inputs.

NOTE:
This system may take some time to return to full functionality after a battery disconnect.

TRAILER TOWING

In this section you will find safety tips and information on limits to the type of towing you can reasonably do with your vehicle. Before towing a trailer, carefully review this information to tow your load as efficiently and safely as possible.

To maintain the New Vehicle Limited Warranty coverage, follow the requirements and recommendations in "Trailer Towing" within the "Starting and Operating" section of the Owner's Manual concerning vehicles used for trailer towing.

TRAILER TOWING WEIGHTS (MAXIMUM TRAILER WEIGHT RATINGS) — SRT

Engine/Transmission	GCWR	Frontal Area	Maximum GTW	Maximum Trailer TW (See Note)
6.4L Automatic	14,600 lb (6,622 kg)	55 sq ft (5.11 sq m)	8,700 lb (3,901 kg)	870 lb (395 kg)
Refer to local laws for maximum trailer towing speeds.				

NOTE:

- The trailer tongue weight must be considered as part of the combined weight of occupants and cargo, and should never exceed the weight referenced on the Tire and Loading Information placard.
- The manufacturer does not recommend using the Run Flat Tire feature while driving a vehicle loaded at full capacity or towing a trailer.

RECREATIONAL TOWING (BEHIND MOTORHOME)

TOWING THIS VEHICLE BEHIND ANOTHER VEHICLE

NOTE:
Recreational towing is not allowed on SRT vehicles.

These vehicles may be towed on a flatbed or vehicle trailer provided all four wheels are **OFF** the ground.

PERFORMANCE PAGES

Performance Pages is an application that provides a display for performance indicators that will help you gain familiarity with the capabilities of your vehicle in real time.

To access the Performance Pages, press the Vehicle button on the touchscreen. Then, press the SRT tab at the top of the touchscreen. Selecting the SRT button will bring you to three different page options: Performance Pages, Drive Modes, and Race Options. Press the Performance Pages button and then press the desired button on the touchscreen to access that specific Performance Page.

WARNING!

Measurement of vehicle statistics with the Performance Pages is intended for off-highway or off-road use only and should not be done on any public roadways. It is recommended that these features be used in a controlled environment and within the limits of the law. The capabilities of the vehicle as measured by the Performance Pages must never be exploited in a reckless or dangerous manner, which can jeopardize the user's safety or the safety of others. Only a safe, attentive, and skillful driver can prevent accidents.


The Performance Pages include the following:

- Timers
- Gauges
- Dyno/Engine
- G-Force
- Vehicle Dynamics


The following describes each feature and its operation:

TIMERS

When the Timers page is selected, you will be able to select the Drag or Accel & Braking Tabs by either pressing the Up or Down Arrows towards the right side of the touchscreen, or dragging your finger in an upwards or downwards motion.

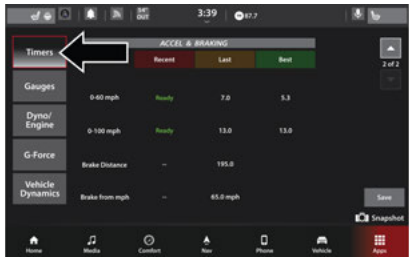

Timers — Accel & Braking

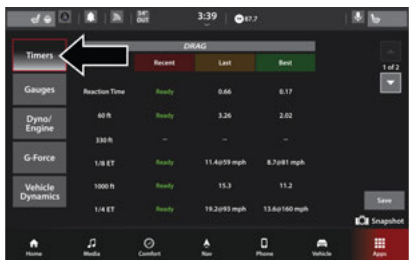

Timers — Drag

- Recent

  A real-time summary of performance timers for the most recent valid run, or the status of a test in progress.
- Last

  The last recorded run of performance timers.
- Best

  The best recorded run of performance timers, except for braking data.

Save To USB

Pressing the Save to USB button will let you save all of the timer data from both the Drag and Accel & Braking Timers pages. The operation of the Save feature is listed below:

NOTE:
Pressing the Snapshot icon in the lower right corner of the screen at any time will save a screenshot of the screen currently being viewed to the connected USB device. Information about your vehicle appears at the time a snapshot is taken such as the VIN, miles on the odometer, longitude and latitude coordinates, and more.

- With a USB drive installed, press the USB button to save to the jump drive.
- Press the Cancel button to return to the Timers page.

The Timers pages contain the timers listed below:

- **Reaction Time**: Measures the driver's reaction time for launching the vehicle against a simulated drag strip timing light (behavior modeled after 500 Sportsman Tree) displayed in the instrument cluster display.

NOTE:
Drag Timers (RT, 60 ft [20 m], 330 ft [100 m], 1/8 mile [200 m], 1000 ft [300 m], and 1/4 mile [400 m]) and Acceleration Timers (0-60 mph [0-96 km/h] and 0-100 mph [0-160 km/h]) will be ready to acquire new recent data measurements when the vehicle is at 0 mph (0 km/h).

- 0-60 mph (0-100 km/h)
- 0-100 mph (0-160 km/h)
- 60 ft (20 m) ET
- 330 ft (100 m) ET
- ⅛ Mile + speed (200 m + speed) ET
- ⅛ Mile + speed (200 m + speed) mph
- 1000 ft (300 m) ET
- ¼ Mile + speed (400 m + speed) ET
- ¼ Mile + speed (400 m + speed) mph
- Brake Distance ft (meters)

NOTE:
The distance measurement will be aborted if the brake pedal is released or the parking brake is engaged, before the vehicle comes to a complete stop.

- Brake from mph (km/h)

NOTE:
Brake Distance and Speed Timers only display "ready" when the vehicle is traveling at greater than 30 mph (48 km/h).

GAUGES



Gauges

When selected, this screen displays the following values:

- Oil Temperature

  Shows the actual oil temperature.
- Oil Pressure

  Shows the actual oil pressure.
- Coolant Temperature

  Shows the actual coolant temperature.

- Battery Voltage

  Shows actual battery voltage.
- Trans Oil Temp — If Equipped with an Automatic Transmission

  Shows actual transmission oil temperature.
- Air Fuel Ratio — If Equipped

  Shows current air fuel ratio.
- I/C Coolant Temp — If Equipped

  Shows actual I/C Coolant temperature.
- Intake Air Temp

  Shows actual air intake temperature.

If a gauge is selected, the Gauge Detail View Page will appear on the screen. This page shows gauge values for the previous two minutes on the selected gauge.



Gauge Detail View Page

Pressing the Up and Down arrows will cycle through the details for each of the gauges. Pressing the minimize button beside the graph will return to the gauge menu.

DYNAMOMETER (DYNO)/ENGINE

Dynamometer (Dyno)

The system will start drawing graphs for Power and Torque (top chart) and Engine Speed (bottom chart). The graph will fill from the left side of the x-axis and fill to the right side of the x-axis (based on History time selected). Once the right side of the page is reached, the graph will scroll with the right side always being the most recent recorded sample.



Dyno Page

The following options can be selected:

- Pressing the STOP button will freeze the graph. Selecting “Play” will clear the graph and restart the process over.
- Press the + or – buttons to change the history of the graph. The selectable options are “30”, “60”, “90”, “120” seconds. The graph will expand or constrict depending on the setting selected.
- Select the Gear display setting to turn the graph gear markers on or off.

NOTE:
The Gear on/off feature will only display if your vehicle is equipped with an Automatic Transmission.

Engine

Press the Up and Down arrow buttons on the right side of the touchscreen to cycle between the Dyno and Engine pages.

4



Engine

When selected, this screen displays the following values:

- **Vehicle Speed**: Shows the actual vehicle speed.
- **Engine Power**: Shows the instantaneous power.
- **Engine Torque**: Shows the instantaneous torque.
- **Oil Pressure**: Shows the actual engine oil pressure.
- **Gear**: Shows the current (or pending) operating gear of the vehicle.

G-Force



G-Force

When G-Force is selected, the following features will be available:

- Vehicle Speed

  Measures the current speed of the vehicle in either mph or km/h, starting at zero with no maximum value.
- Front G-Force

  Measures the peak braking force on the front of the vehicle.
- Right G-Force

  Measures the peak force on the right side of the vehicle.
- Left G-Force

  Measures the peak force on the left side of the vehicle.
- Rear G-Force

  Measures the peak acceleration force on the rear of the vehicle.

NOTE:

Front, Right, Left, and Rear G-Forces are all peak values. These readings can be reset by clearing peak G-Force on the instrument cluster.

The friction circle display shows instantaneous G-Force as a highlight and previous G-Force as dots within the circle. The system records previous G-Force for three minutes. If there are multiple samples at a given point, the color of the dot will darken from blue to red. Vectors more frequent will show in red; infrequent vectors will show in blue.

Pitch & Roll

The Pitch & Roll page displays the vehicle's current pitch (angle up and down) and roll (angle side to side) in degrees. The Pitch & Roll gauges provide a visualization of the current vehicle angle.

VEHICLE DYNAMICS

The Vehicle Dynamics page displays information concerning the vehicle's drivetrain



Vehicle Dynamics

Steering Wheel Angle

Steering Wheel Angle utilizes the steering angle sensor to measure the degree of the steering wheel relative to zero (straight ahead) reference angle. The zero degree reference angle measurement indicates a steering wheel straight ahead position.

SRT DRIVE MODES — IF EQUIPPED

Your SRT vehicle is equipped with a Drive Modes feature which allows for coordinating the operation of various vehicle systems depending upon the type of driving behavior desired. The Drive Modes feature is controlled through the touchscreen and may be accessed by performing any of the following:

- Selecting "Vehicle", then "SRT" and then "Drive Modes" from the Vehicle menu.
- Pushing the SRT button on the instrument panel switchbank.

The SRT Drive Modes main screen displays the current Drive Mode and real-time status of the vehicle's performance configuration. The selectable Drive Modes are Track, Sport, Auto, Snow, Tow, and Custom. Information shown will indicate the actual status of each system, along with a vehicle graphic that displays the active Drive Mode status. The color red indicates "Track," orange "Sport," yellow "Street", blue "Snow", and purple "Tow". These features will reset to AUTO upon an ignition cycle. If the system status shown does not match the current Drive Mode Set-Up, a message will be displayed indicating which values are not matching the current mode.

SPORT MODE



Drive Modes (Sport)

Selecting "Sport" on the touchscreen will activate the configuration for typical enthusiast driving. The Transmission, Stability Control, All-Wheel Drive, Steering, and Suspension systems are all set to their Sport settings. The Paddle Shifters are enabled.



Sport Mode Set-Up

4

TRACK MODE



Drive Modes (Track)

Selecting “Track” on the touchscreen will activate the configuration for typical track driving. The Transmission, Stability Control, All-Wheel Drive, Steering, and Suspension systems are all set to their Track settings. The Paddle Shifters are enabled.



Track Mode Set-Up

NOTE:
Electronic Stability Control (ESC) Full-Off can be activated by pushing and holding the ESC Off button on the instrument panel switch bank for five seconds.

TOW MODE



Drive Modes (Tow)

Selecting “Tow” on the touchscreen will activate the configuration for towing a trailer or hauling heavy loads in the cargo area. Once in this mode, trailer sway control is enabled in the ESC system. The Transmission, is set to Tow, Suspension is set to Sport, Stability Control is set to Full, All-Wheel Drive is set to Track, and Steering is set to Street. The Paddle Shifters are enabled.



Tow Mode Set-Up

SNOW MODE



Drive Mode (Snow)

Selecting “Snow” on the touchscreen will activate Snow Mode for use on loose traction surfaces. When in Snow Mode (depending on certain operating conditions), the transmission will use second gear (rather than first gear) during

launches, to minimize wheel slippage. The Transmission is set to Snow, Stability Control is set to Full, All-Wheel Drive is set to 50/50, and Steering and Suspension are set to Street.

The Paddle Shifters can be enabled or disabled by pressing the Snow Set-Up button on the touchscreen.



Snow Mode Set-Up

Auto Mode



Drive Mode Auto (Default)

Auto Mode is enabled upon ignition ON, or by selecting “Auto” on the touchscreen. The Transmission, Stability Control, and All-Wheel Drive modes are set to their Street settings. Steering and Suspension can be configured in Track, Sport, or Street. The Paddle Shifters may be enabled or disabled while in Auto Mode Set-Up.



Auto Mode Set-Up

Eco Mode

Press the ECO button on the touchscreen to activate ECO Mode. ECO Mode modifies the vehicle’s engine and transmission settings to provide improved fuel economy with a trade-off in acceleration performance. Increased engine exhaust noise and/or vibration may be noticed while ECO is active. This is normal and a result of the increased amount of operating conditions where the vehicle is allowed to operate in four-cylinder mode.

The Paddle Shifters will be disabled while in ECO Mode.

- ECO is only available in AUTO Mode.
- Changing the Drive Mode out of Auto will deactivate ECO.

- ECO will be disabled when another Drive Mode is selected or ECO button is pushed.
- When ECO is activated in AUTO Mode, it will remain in ECO upon activation of AUTO Mode from any other mode including across key cycles. To deactivate, press the ECO button again.

Custom Mode



Drive Mode (Custom)

Custom Mode may be selected by pushing the Custom button on the touchscreen. Custom Mode allows you to create a custom configuration that is saved for quick selection of your favorite settings. While in Custom Mode, the Transmission, All-Wheel Drive, Stability Control, Suspension, Steering, and Paddle Shifter settings are shown in their current configuration.

Custom Mode Set-Up Info


Within the Custom Mode Set-Up screen, press the info button on the touchscreen then use the left/right arrow to scroll through all the available Drive Mode systems giving you a description of their operation and current configuration.



Custom Mode Set-Up

NOTE:
Some levels are not available in every Drive Mode Set-Up.

Transmission

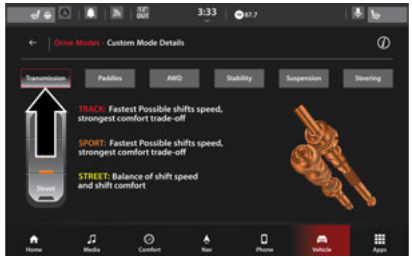

Transmission

- Track

  Press the Track button on the touchscreen to provide the fastest shift speeds with the highest comfort trade-off.
- Sport

  Press the Sport button on the touchscreen to provide faster shift speeds with some comfort trade-off.
- Street

  Press the Street button on the touchscreen to provide a balance of shift speed and comfort for typical daily driving.

Paddle Shifters




Paddle Shifters

- ON

  Press the On button on the touchscreen to enable steering wheel Paddle Shifters.
- OFF

  Press the Off button on the touchscreen to disable steering wheel Paddle Shifters.

All-Wheel Drive

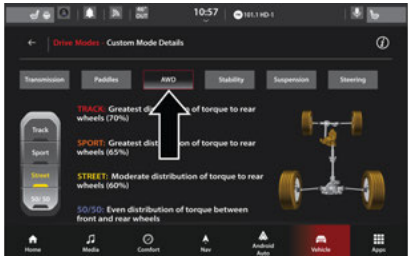

All-Wheel Drive

- Track


  Press the Track button on the touchscreen to provide the greatest distribution of torque to the rear wheels (70%).
- Sport

  Press the Sport button on the touchscreen to provide greater distribution of torque to the rear wheels (65%).
- Street

  Press the Street button on the touchscreen to provide moderate distribution of torque to the rear wheels (60%).
- 50/50

  Press the 50/50 button on the touchscreen to provide even distribution of torque between the front and rear wheels.

Stability Control

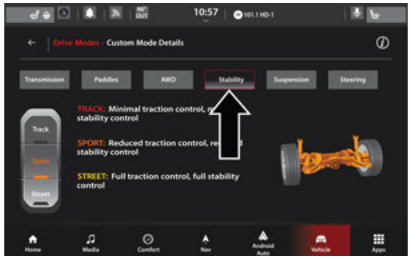

Stability Control

- Track

  Pressing the Track button on the touchscreen will provide minimal stability control.


NOTE:
Traction control is automatically turned off when TRACK Mode stability is selected.

- Sport

  Pressing the Sport button on the touchscreen will provide reduced stability control.
- Street

  Pressing the Street button on the touchscreen provides full (default) stability control.

Suspension

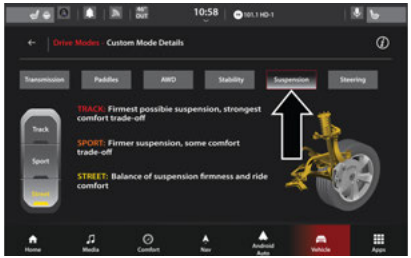

Suspension


- Track

  Press the Track button on the touchscreen to provide the firmest suspension stiffness with the highest amount of comfort trade-off.
- Sport

  Press the Sport button on the touchscreen to provide a firmer suspension stiffness with moderate comfort trade-off.
- Street

  Press the Street button on the touchscreen to provide a balance of suspension stiffness and ride comfort for typical daily driving.

Steering

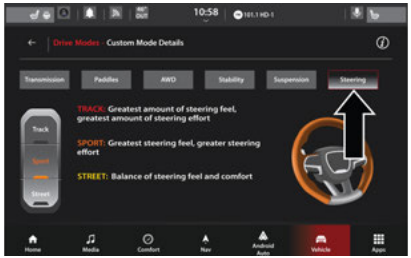

Steering

- Track

  Press the Track button on the touchscreen to adjust the steering effort and feel to the greatest level.
- Sport

  Press the Sport button on the touchscreen to adjust the steering effort and feel to a greater level.
- Street

  Press the Street button on the touchscreen to balance the steering feel and comfort.

Race Options


Press the Vehicle button on the touchscreen. From there you can press the SRT button and then the Race Options button which will display the vehicle's Launch Control screen. Within Race Options, you can activate, deactivate, and adjust the RPM values for the Launch Control and Shift Light features ➪ page 28.

Launch Control

WARNING!
Launch Control is intended for off-highway or off-road use only and should not be used on any public roadways. It is recommended that this feature be used in a controlled environment, and within the limits of the law. The capabilities of the vehicle as measured by the performance pages must never be exploited in a reckless or dangerous manner, which can jeopardize the user's safety or the safety of others. Only a safe, attentive, and skillful driver can prevent accidents.

This vehicle is equipped with a Launch Control system that is designed to allow the driver to achieve maximum vehicle acceleration in a straight line. Launch Control is a form of traction control that manages tire slip while launching the vehicle. This feature is intended for use during race events on a closed course where consistent quarter-mile and 0-to-60 times are desired. The system is not

intended to compensate for lack of driver experience or familiarity with the race track. Use of this feature in low traction (cold, wet, gravel, etc.) conditions may results in excess wheel slip outside this systems control resulting in an aborted launch.

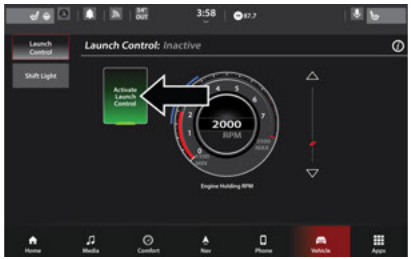

Activate Launch Control

Preconditions:

- Launch Control should not be used on public roads. Always check track conditions and the surrounding area.
- Launch Control is not available within the first 500 miles (805 km) of engine break-in.
- Launch Control should only be used when the engine and transmission are at operating temperature.
- Launch Control is intended to be used on dry, paved road surfaces only.

Launch Control is only available when the following procedure is followed:

1. Press the Race Options tab on the touchscreen to set RPM, or push the LAUNCH button on the console to activate Launch Control.
2. Press the Activate Launch Control button on the touchscreen, follow instructions in the instrument cluster display.
   - Make sure the vehicle is not moving.
   - Put vehicle in first gear or Drive.
   - Steering wheel must be centered with tires pointing forward.
   - Vehicle must be on level ground.
   - Apply brake pressure.
   - While holding the brake, rapidly apply and hold the accelerator pedal to wide open throttle. The engine speed will hold at the RPM that was set in the “Launch Control” screen.

NOTE:
Messages will appear in the instrument cluster display to inform the driver if one or more of the above conditions have not been met.

3. When the above conditions have been met, the instrument cluster display will read “Release Brake”.
4. Keep the vehicle pointed straight and release the brake.


Launch Control will be active until the vehicle reaches 62 mph (100 km/h), at which point the Electronic Stability Control (ESC) system will return to its current ESC mode.

Launch Control will abort before launch completion and will display “Launch Aborted” in the cluster under any the following conditions:

- The accelerator pedal is released during launch.
- The ESC system detects that the vehicle is no longer moving in a straight line.
- The ESC Off button is pressed to change the system to another mode.

NOTE:
The Launch Control RPM setting can only be adjusted while Launch Control is not active. After Launch Control has been aborted, ESC will return to its current ESC mode.

CAUTION!
Do not attempt to shift when the drive wheels are spinning and do not have traction. Damage to the transmission may occur.

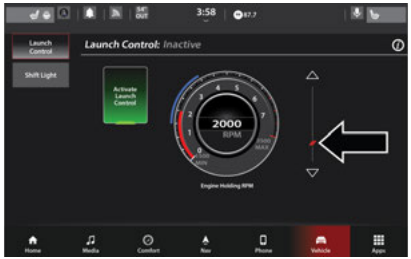

Launch RPM Set-Up

To adjust the Launch RPM, drag the slider bar or press the arrows on the touchscreen to adjust the holding RPM. The launch RPM limit is between the minimum and maximum RPM values shown on the gauge, in 100 RPM increments.

Shift Light

Your vehicle is equipped with a Shift Light feature that illuminates the back light of the tachometer in red within the instrument cluster display. This feature is a visual cue to manually upshift using the Paddle Shifters or shifting the transmission gear selector.



Shift Light Button

To actuate the Shift Light feature, press the Shift Light button on the touchscreen while in the Race Options tab, then press the Activate Shift Light button on the touchscreen. Activation is shown on the instrument cluster display.

Once the Shift Light is configured on, it is only active while the gear shifter is in the Manual or Sport shifter position (M or S position).

NOTE:
Paddle Shifters can be used to shift, however using the Paddle Shifters while the shifter is in Drive (D) position will not enable the Shift Light feature.



Shift Light RPM Set-Up

The Shift Light RPM Set-Up allows you to set the Shift Light to illuminate for gears 1, 2, 3, 4, and 5-8. Pressing and releasing the Up/Down arrow buttons above and below each listed gear, the RPM values will change in increments of 250 RPM. Pressing and holding the arrows will change the RPM values in increments of 500 RPM, ranging to 6250 RPM. The Shift Light Set-Up screen may only be accessed if the feature is enabled. Press the Reset to Factory Default button on the touchscreen to change back to factory settings, or press the Deactivate Shift Light button on the touchscreen to turn the system off completely.

Guidelines For Track Use

- Drive Modes will alter the vehicle's performance in various driving situations. It is recommended that your vehicle operates in SPORT or TRACK mode during the track event.

- Prior to each track event, verify all fluids are at the correct levels.
- Prior to each track event, verify the front and rear brake pads have more than half pad thickness remaining. If the brake pads require changing, complete a brake burnish procedure prior to track outing at full pace.

NOTE:
Use of DOT 4 brake fluid is suggested for extended truck usage due to increased thermal capacity.

- At the conclusion of each track event, it is recommended that a brake bleed procedure is performed to maintain the pedal feel and stopping capability of your Brembo High Performance brake system.
- It is recommended that each track outing should end with a minimum of one cooldown lap using minimal braking.
- All SRT vehicles are track tested for 24 hours of endurance, however, it is recommended that suspension system, brake system, prop shaft, and half shaft boots should be checked for wear or damage after every track event.
- Track usage results in increased operating temperatures of the engine, transmission, driveline, and brake system. This may affect Noise Vibration Harshness (NVH) countermeasures of your vehicle. New components may need to be installed to return the system to the original NVH performance.
- Tire pressure:
  - Recommended tire pressure of 33 psi (230 kPa) when tires are cold, or below 42 psi (290 kPa) when hot.

NOTE:
It is recommended that you target below 42 psi (290 kPa) when tires are hot at the conclusion of each track session. Starting at 33 psi (230 kPa) cold and adjusting based on ambient and track conditions is recommended. Tire pressure can be monitored via the instrument cluster display and can assist with adjustments.

Track burnishing your brakes:

To avoid "green lining fade" during track use, the brake pads and rotors must have a thermal burnish for factory-installed components or when new brake friction components are installed:

1. Use one track session to burnish brakes by driving at 75% speed. Brake at approximately 0.60 - 0.80g max without Anti-Lock Brake System (ABS) intervention.
2. Complete one lap in this manner until you start smelling the brakes. Continue for another half lap at speed, then complete a two-lap cooldown with minimal brake applications. Ensure the brakes are not smoking. If they are, complete another cooldown lap.
3. Getting the brakes to smoke is indication that the brakes have overheated and may negatively affect future track usage.
4. Allow the vehicle to sit and cool in the paddock for at least 30 minutes. If an infrared thermal gun is available, allow rotors to cool to 200°F (93.3°C) before returning to the track.
5. There should be a thin layer of ash when inspecting the brake pads. Having the ash layer go more than half the thickness of the pad material is a sign of an overly aggressive burnish.
6. Occasionally, a second burnish session is required. If the brake pads begin to emit an odor during the next track session, reduce vehicle speed and braking deceleration rate to burnish targets and follow steps 2-4.
7. New pads installed on old rotors still need to be burnished. New rotors installed with old pads should be burnished at the track or street driven for 300 city miles to develop an adequate lining transfer layer on the rotor surface prior to track use.
8. Rotors that pulsate during track use should be replaced.

NOTE:
Resurfacing of the rotors is not recommended, as it removes mass from the rotor, reducing its thermal capacity. Resurfacing also thins the rotor cheek, making it less robust and increasing the likelihood of pulsation in further track use.

SAFETY FEATURES

ELECTRONIC BRAKE CONTROL (EBC) SYSTEM

Your vehicle is equipped with an advanced Electronic Brake Control (EBC) system. For a complete list of available systems please see your Owner's Manual.

ESC Operating Modes

Depending upon model and mode of operation, the ESC system may have multiple operating modes.

ESC On

This is the normal operating mode for the ESC. Whenever the vehicle is started, the ESC system will be in this mode. This mode should be used for most driving conditions. Alternate ESC modes should only be used for specific reasons as noted in the following paragraphs.

Partial Off

This mode may be useful if the vehicle becomes stuck. This mode may modify TCS and ESC thresholds for activation, which allows for more wheel spin than normally allowed.

To enter the "Partial Off" mode, momentarily push the ESC OFF button and the ESC OFF Indicator Light will illuminate. To turn the ESC on again, momentarily push the ESC OFF button and the ESC OFF Indicator Light will turn off.

NOTE:
For vehicles with multiple partial ESC modes, the push and release of the button will toggle the ESC modes. Multiple attempts may be required to return to "ESC On" mode.

WARNING!

- When in "Partial Off" mode, the TCS functionality of ESC (except for the limited slip feature described in the TCS section) has been disabled and the ESC OFF Indicator Light will be illuminated. When in "Partial Off" mode, the engine power reduction feature of TCS is disabled, and the enhanced vehicle stability offered by the ESC system is reduced.
- Trailer Sway Control (TSC) is disabled when the ESC system is in the "Partial Off" mode.

Full Off — If Equipped

This mode is intended for off-highway or off-road use only and should not be used on any public roadways. In this mode, TCS and ESC features are turned off. To enter the "Full Off" mode, push and hold the ESC OFF button for five seconds while the vehicle is stopped with the engine running. After five seconds, a chime will sound, the ESC OFF Indicator Light will illuminate, and the "ESC OFF" message will display in the instrument cluster. To turn ESC on again, momentarily push the ESC OFF button.

NOTE:
The system may switch from ESC "Full Off" to "Partial Off" mode when the vehicle exceeds a predetermined speed. When the vehicle speed slows below the predetermined speed the system will return to ESC "Full Off".

"Full Off" can only be achieved in Track Mode (if equipped).

ESC modes may also be affected by drive modes (if equipped).

WARNING!

- In the ESC “Full Off” mode, the engine torque reduction and stability features are disabled. Therefore, enhanced vehicle stability offered by the ESC system is unavailable. In an emergency evasive maneuver, the ESC system will not engage to assist in maintaining stability. ESC “Full Off” mode is intended for off-highway or off-road use only.
- The Electronic Stability Control (ESC) cannot prevent the natural laws of physics from acting on the vehicle, nor can it increase the traction afforded by prevailing road conditions. ESC cannot prevent all accidents, including those resulting from excessive speed in turns, driving on very slippery surfaces, or hydroplaning. ESC also cannot prevent collisions.

SAFETY TIPS

PERIODIC SAFETY CHECKS YOU SHOULD MAKE OUTSIDE THE VEHICLE

Fluid Leaks

Check area under the vehicle after overnight parking for fuel, coolant, oil, or other fluid leaks. Also, if gasoline fumes are detected or if fuel or brake fluid leaks are suspected, the cause should be located and corrected immediately.

WARNING!

To prevent SERIOUS INJURY or DEATH when using “Track-Use” parts and equipment:

- NEVER use any “Track-Use” equipment on public roads. FCA US LLC does not authorize the use of “Track-Use” equipment on public roads.
- The intended use of “Track-Use” parts is for race vehicles on race tracks. To help ensure the safety of the race driver, engineers should supervise the installation of “Track-Use” parts.
- FCA US LLC does not authorize the installation or use of any part noted as “Track-Use” on any new vehicle prior to its first retail sale.

WARNING!

To prevent SERIOUS INJURY or DEATH:

- ALWAYS remove any “Track-Use” equipment before driving on public roads.
- ALWAYS properly use your three-point seat belts when driving on public roads.
- In a collision, you and your passengers can suffer much greater injuries if you are not properly buckled up. You can strike the interior of your vehicle or other passengers, or you can be thrown out of the vehicle.

IN CASE OF EMERGENCY

JACKING AND TIRE CHANGING

Run Flat Tires

SRT models are equipped with “run flat” tires. Run flat tires provide temporary extended mobility in the event a puncture results in complete loss of air pressure. Run flat tires allow the vehicle to be driven approximately 50 miles (80 km) at 50 mph (80 km/h). Tire service should be obtained to avoid prolonged run flat feature usage.

WARNING!
Do not exceed 50 mph (80 km/h) if the Tire Pressure Monitoring Telltale Light is illuminated. Vehicle handling and braking may be reduced. You could have a collision and be severely or fatally injured.

TOWING A DISABLED VEHICLE

FCA US LLC requires towing your vehicle with all four wheels **OFF** the ground using a flatbed.

If the key fob is unavailable, or the vehicle's battery is discharged. Refer to “Manual Park Release” within the “In Case Of Emergency” section of the Owner's Manual for instructions on shifting the transmission out of PARK (P) for loading onto a flatbed truck.

CAUTION!
● Towing this vehicle using any other method can cause severe transmission and/or transfer case damage. ● Damage from improper towing is not covered under the New Vehicle Limited Warranty.

SERVICING AND MAINTENANCE

SCHEDULED SERVICING — SRT

The Scheduled Maintenance services listed in this manual must be done at the times or mileages specified to protect your vehicle warranty and ensure the best vehicle performance and reliability. More frequent maintenance may be needed for vehicles in severe operating conditions, such as dusty areas and very short trip driving. Inspection and service should also be done anytime a malfunction is suspected.

The oil change indicator system will remind you that it is time to take your vehicle in for scheduled maintenance.

The instrument cluster display will display an "Oil Change Required" message and a single chime will sound, indicating that an oil change is necessary.

Based on engine operation conditions, the oil change indicator message will illuminate. This means that service is required for your vehicle. Have your vehicle serviced as soon as possible, within the next 500 miles (805 km).

NOTE:

- The oil change indicator message will not monitor the time since the last oil change. Change your vehicle's oil if it has been six months since your last oil change, even if the oil change indicator message is NOT illuminated.
- Change your engine oil more often if you drive your vehicle off-road for an extended period of time.
- Under no circumstances should oil change intervals exceed 6,000 miles (10,000 km) or six months, whichever comes first.

An authorized dealer will reset the oil change indicator message after completing the scheduled oil change. If a scheduled oil change is performed by someone other than an authorized dealer, the message can be reset by referring to the steps described under instrument cluster display ➪ page 7.

At Each Stop For Fuel

- Check the engine oil level.
- Check the windshield washer solvent and add if required.

Once A Month

- Check tire pressure and look for unusual wear or damage.
- Inspect the battery, and clean and tighten the terminals as required.
- Check the fluid levels of the coolant reservoir, engine oil, brake master cylinder, and add as needed.
- Check all lights and other electrical items for correct operation.

At Each Oil Change

- Change the engine oil filter.
- Inspect the brake hoses and lines.
- Inspect the CV/Universal joints.
- Rotate the tires at the first sign of irregular wear, even if it occurs before the oil indicator system turns on.

CAUTION!
Failure to perform the required maintenance items may result in damage to the vehicle.

MAINTENANCE PLAN

Miles:	6,000	12,000	18,000	24,000	30,000	36,000	42,000	48,000	54,000	60,000	66,000	72,000	78,000	84,000	90,000	96,000	102,000	108,000	114,000	120,000	126,000	132,000	138,000	144,000	150,000
Or Months:	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144	150
Or Kilometers:	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000	110,000	120,000	130,000	140,000	150,000	160,000	170,000	180,000	190,000	200,000	210,000	220,000	230,000	240,000	250,000
Change the engine oil and engine oil filter.	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Rotate the tires, rotate at the first sign of irregular wear, even if it occurs before scheduled maintenance.	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
If using your vehicle for any of the following: dusty or off-road conditions. Inspect the engine air cleaner filter; replace if necessary.		X		X		X		X		X		X		X		X		X		X		X		X	
Inspect the brake linings; replace if necessary.		X		X		X		X		X		X		X		X		X		X		X		X	

Miles:	6,000	12,000	18,000	24,000	30,000	36,000	42,000	48,000	54,000	60,000	66,000	72,000	78,000	84,000	90,000	96,000	102,000	108,000	114,000	120,000	126,000	132,000	138,000	144,000	150,000
Or Months:	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144	150
Or Kilometers:	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000	110,000	120,000	130,000	140,000	150,000	160,000	170,000	180,000	190,000	200,000	210,000	220,000	230,000	240,000	250,000
Inspect the CV/Universal joints.	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Inspect the exhaust system.		X		X		X		X		X		X		X		X		X		X		X		X	
Adjust the parking brake on vehicles equipped with four wheel disc brakes.					X					X					X					X					X
Inspect transfer case fluid.					X					X					X					X					X
Inspect the accessory drive belts replace if necessary.										X										X					
Inspect front suspension, tie rod ends, and boot seals, for cracks or leaks and all parts for damage, wear, improper looseness or end play; replace if necessary.		X		X		X		X		X		X		X		X		X		X		X		X	

Miles:	6,000	12,000	18,000	24,000	30,000	36,000	42,000	48,000	54,000	60,000	66,000	72,000	78,000	84,000	90,000	96,000	102,000	108,000	114,000	120,000	126,000	132,000	138,000	144,000	150,000
Or Months:	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144	150
Or Kilometers:	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000	110,000	120,000	130,000	140,000	150,000	160,000	170,000	180,000	190,000	200,000	210,000	220,000	230,000	240,000	250,000
Replace the engine air cleaner filter.					X					X					X					X					X
Replace the cabin air filter.	To be replaced every 12,000 mi (19,000 km).																								
Inspect and replace the PCV Valve if necessary.															X										
Change front and rear axle fluid.					X					X					X					X					X
Change transfer case fluid.											X												X		
Replace the spark plugs – 6.4L Engine. [1]																X									

Miles:	6,000	12,000	18,000	24,000	30,000	36,000	42,000	48,000	54,000	60,000	66,000	72,000	78,000	84,000	90,000	96,000	102,000	108,000	114,000	120,000	126,000	132,000	138,000	144,000	150,000
Or Months:	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138	144	150
Or Kilometers:	10,000	20,000	30,000	40,000	50,000	60,000	70,000	80,000	90,000	100,000	110,000	120,000	130,000	140,000	150,000	160,000	170,000	180,000	190,000	200,000	210,000	220,000	230,000	240,000	250,000
Flush and replace the engine coolant at 120 months if not done at 150,000 miles (240,000 km).																				X					X

1. The spark plug change interval is mileage based only, monthly intervals do not apply.


7

WARNING!

- You can be badly injured working on or around a motor vehicle. Do only service work for which you have the knowledge and the right equipment. If you have any doubt about your ability to perform a service job, take your vehicle to a competent mechanic.
- Failure to properly inspect and maintain your vehicle could result in a component malfunction and effect vehicle handling and performance. This could cause an accident.

ENGINE COMPARTMENT

6.4L Engine

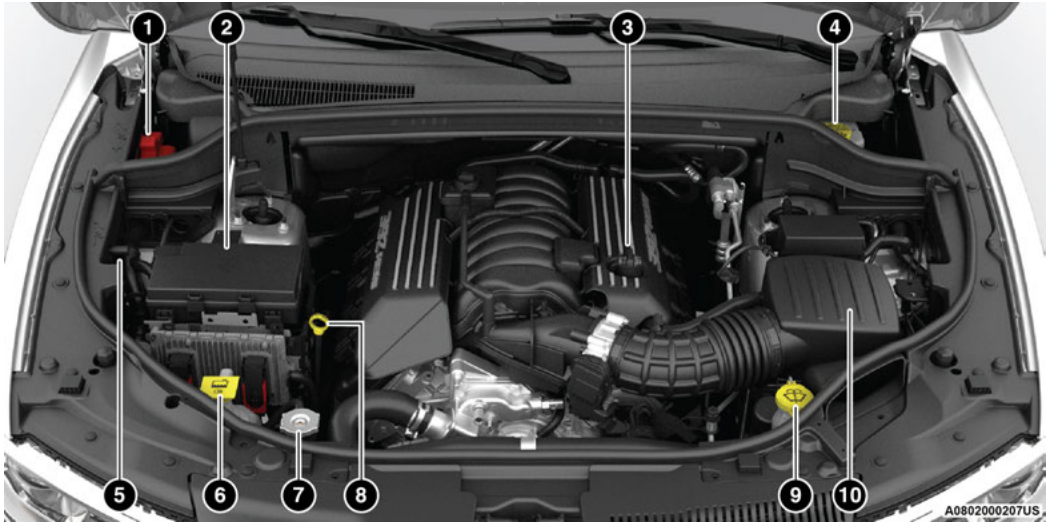

1 — Remote Jump Start Positive Terminal
2 — Power Distribution Center (Fuses)
3 — Engine Oil Fill
4 — Brake Fluid Reservoir Cap
5 — Remote Jump Start Negative Terminal
6 — Engine Coolant Reservoir Cap
7 — Engine Coolant Pressure Cap
8 — Engine Oil Dipstick
9 — Washer Fluid Reservoir Cap
10 — Engine Air Cleaner Filter

PRESSURE WASHING

Cleaning the engine compartment with a high pressure washer is not recommended.

CAUTION!
Precautions have been taken to safeguard all parts and connections however, the pressures generated by these machines is such that complete protection against water ingress cannot be guaranteed.

VEHICLE MAINTENANCE

An authorized dealer has the qualified service personnel, special tools, and equipment to perform all service operations in an expert manner. Service Manuals are available which include detailed service information for your vehicle. Refer to these Service Manuals before attempting any procedure yourself.

NOTE:
Intentional tampering with emission control systems may void your warranty and could result in civil penalties being assessed against you.

WARNING!
You can be badly injured working on or around a motor vehicle. Only do service work for which you have the knowledge and the proper equipment. If you have any doubt about your ability to perform a service job, take your vehicle to a competent mechanic.

ENGINE OIL

Engine Oil Selection — SRT

Use only the manufacturer's recommended fluid ➪ page 43.

NOTE:
Hemi engines at times can tick right after startup and then quiet down after approximately 30 seconds. This is normal and will not harm the engine. This characteristic can be caused by short drive cycles. For example, if the vehicle is started then shut off after driving a short distance. Upon restarting, you may experience a ticking sound. Other causes could be if the vehicle is unused for an extended period of time, incorrect oil, extended oil changes or extended idling. If the engine continues to tick or if the Malfunction Indicator Light (MIL) comes on, see the nearest authorized dealer.

American Petroleum Institute (API) Approved Engine Oil

These symbols mean that the oil has been certified by the API. The manufacturer only recommends API trademark oils.



The API Starburst trademark certifies 0W-20, 0W-30 and 5W-30 engine oils.



The API Donut trademark certifies 0W-40 and 5W-40 engine oil.

CAUTION!
Do not use chemical flushes in your engine oil as the chemicals can damage your engine. Such damage is not covered by the New Vehicle Limited Warranty.

Synthetic Engine Oils

Your engine was designed for synthetic engine oils, only use synthetic API approved engine oils.

Synthetic engine oils which do not have both the correct API trademark and the correct SAE viscosity grade numbers should not be used.

7

Materials Added To Engine Oil

The manufacturer strongly recommends against the addition of any additives (other than leak detection dyes) to the engine oil. Engine oil is an engineered product and its performance may be impaired by supplemental additives.

Disposing Of Used Engine Oil And Oil Filters

Care should be taken in disposing of used engine oil and oil filters from your vehicle. Used oil and oil filters, indiscriminately discarded, can present a problem to the environment. Contact an authorized dealer, service station or governmental agency for advice on how and where used oil and oil filters can be safely discarded in your area.

ENGINE OIL FILTER

The engine oil filter should be replaced with a new filter at every engine oil change.

Engine Oil Filter Selection

A full-flow type disposable oil filter should be used for replacement. The quality of replacement filters varies considerably. Only high quality Mopar® certified filters should be used.

TECHNICAL SPECIFICATIONS

BRAKE SYSTEM

Your vehicle is equipped with dual hydraulic brake systems. If either of the two hydraulic systems lose normal capability, the remaining system will still function. However, there will be some loss of overall braking effectiveness. You may notice increased pedal travel during application, greater pedal force required to slow or stop, and potential activation of the Brake Warning Light.

In the event power assist is lost for any reason (i.e., repeated brake applications with the engine off) the brakes will still function. However, the effort required to brake the vehicle will be much greater than that required with the power system operating.

WHEEL AND TIRE TORQUE SPECIFICATIONS

Proper lug nut/bolt torque is very important to ensure that the wheel is properly mounted to the vehicle. Any time a wheel has been removed and reinstalled on the vehicle, the lug nuts/bolts should be torqued using a properly calibrated torque wrench using a six-sided (hex) deep wall socket.

TORQUE SPECIFICATIONS

SRT Model Vehicle

Lug Nut/Bolt Torque	**Lug Nut/ Bolt Size	Lug Nut/Bolt Socket Size
110 Ft-Lb (149 N·m)	M14 x 1.50	22 mm

**Use only authorized dealer recommended lug nuts/ bolts and clean or remove any dirt or oil before tightening.

Inspect the wheel mounting surface prior to mounting the tire and remove any corrosion or loose particles.

Tighten the lug nuts/bolts in a star pattern until each nut/bolt has been tightened twice. Ensure that the socket is fully engaged on the lug nut/bolt (do not insert it half way).

NOTE:
If in doubt about the correct tightness, have them checked with a torque wrench by an authorized dealer or service station.

After 25 miles (40 km), check the lug nut/bolt torque to be sure that all the lug nuts/bolts are properly tightened.

WARNING!
To avoid the risk of forcing the vehicle off the jack, do not tighten the lug nuts/bolts fully until the vehicle has been lowered. Failure to follow this warning may result in personal injury.

FUEL REQUIREMENTS

While operating on gasoline with the required octane number, hearing a light knocking sound from the engine is not a cause for concern. However, if the engine is heard making a heavy knocking sound, see a dealer immediately. Use of gasoline with a lower than recommended octane number can cause engine failure and may void the New Vehicle Limited Warranty.

Poor quality gasoline can cause problems such as hard starting, stalling, and hesitations. If you experience these symptoms, try another brand of gasoline before considering service for the vehicle.

6.4L ENGINE

Do not use E-85 flex fuel or ethanol blends greater than 15% in this engine.



This engine is designed to meet all emissions regulations, provide optimal fuel economy and performance when using high-quality unleaded premium gasoline having a posted octane number of 91 as specified by the (R+M)/2 method. The use of 91 or higher octane premium gasoline is required for in this engine.

FLUID CAPACITIES

	US	Metric
Fuel (Approximate)		
All Engines	24.6 Gallons	93 Liters
Engine Oil With Filter		
6.4L Engine	7 Quarts	6.6 Liters
Cooling System*		
6.4L Engine	16 Quarts	15.5 Liters

* Includes heater and coolant recovery bottle filled to MAX level.

ENGINE FLUIDS AND LUBRICANTS

Component	Fluid, Lubricant or Genuine Part
Engine Coolant	We recommend using Mopar® Antifreeze/Coolant 10 Year/150,000 Mile (240,000 km) Formula OAT (Organic Additive Technology) that meets the requirements of the manufacturer Material Standard MS.90032.
Engine Oil	We recommend using Mopar® API Certified SAE 0W-40 Full Synthetic Engine Oil which meets the requirements of the manufacturer Material Standard MS-12633. Equivalent full synthetic SAE 0W-40 engine oil can be used but must have the API Donut trademark ➪ page 39.
Engine Oil Filter	We recommend using a Mopar® Engine Oil Filter. If a Mopar® Engine Oil Filter is unavailable only use filters that meet or exceed SAE/USCAR-36 Filter Performance Requirements.
Fuel Selection	Premium Unleaded 91 Octane Only or Higher (R+M)/2 method, 0-15% ethanol (Do not use E-85).

CHASSIS FLUIDS AND LUBRICANTS

Component	Fluid, Lubricant, or Genuine Part
Automatic Transmission	Use only Mopar® ZF 8 & 9 Speed ATF Automatic Transmission Fluid or equivalent. Failure to use the correct fluid may affect the function or performance of your transmission.
Transfer Case – Single-Speed	We recommend using Mopar® ATF+4 Automatic Transmission Fluid.
Axle Differential (Front)	We recommend using Mopar® GL-5 Synthetic Axle Lubricant SAE 75W-85.

Component	Fluid, Lubricant, or Genuine Part
Axle Differential (Rear) – With Electronic Limited-Slip Differential (ELSD)	We recommend using Mopar® GL-5 Synthetic Axle Lubricant SAE 75W-85 with integrated friction modifier.
Brake Master Cylinder	We recommend using Mopar® DOT 3 Brake Fluid, SAE J1703 should be used. If DOT 3 SAE J1703 brake fluid is not available, then DOT 4 is acceptable. If using DOT 4 brake fluid, the fluid must be changed every 24 months. This interval is time-based only, mileage intervals do not apply.

INDEX

A

About Your Brakes 41
Antifreeze (Engine Coolant) 42
Automatic Transmission
- Adding Fluid 43
- Fluid Type 43

Axle Lubrication 43

B

Brake Control System, Electronic 30
Brake Fluid 43
Brake System 41
- Anti-Lock (ABS) 41
- Fluid Check 43

C

Capacities, Fluid 42
Caps, Filler
- Oil (Engine) 38, 39

Checking Your Vehicle For Safety 31
Checks, Safety 31
Cooling System
- Cooling Capacity 42
- Selection Of Coolant (Antifreeze) 42, 43

E

Economy (Fuel) Mode 12
Electric Brake Control System 30
Emergency, In Case Of
- Jacking 32

Engine 38
- Break-In Recommendations 11
- Compartment 38
- Coolant (Antifreeze) 43
- Oil 39, 42, 43
- Oil Filler Cap 38, 39
- Oil Filter 40
- Oil Selection 39, 42
- Oil Synthetic 39

Engine Oil Viscosity 39

F

Filters
- Engine Oil 40, 43
- Engine Oil Disposal 40

Fluid Capacities 42
Fluid Leaks 31
Fluid, Brake 43
Fuel 42
- Economy Mode 12
- Gasoline 42
- Octane Rating 42, 43
- Specifications 43
- Tank Capacity 42

G

Gasoline, (Fuel) 42

I

Instrument Cluster 6, 7
- Display 7, 8
- Menu Items 8

L

Leaks, Fluid 31
Lug Nuts/Bolts 41

M

Maintenance Schedule 33

O
Octane Rating, Gasoline (Fuel) 42, 43
Oil Filter, Change 40
Oil Filter, Selection 40
Oil, Engine 39, 43
Capacity 42
Disposal 40
Filter 40, 43
Filter Disposal 40
Identification Logo 39
Materials Added To 40
Recommendation 39, 42
Synthetic 39
Viscosity 39, 42

P
Performance 8
Power
Brakes 41

R
Recreational Towing 16

S
Safety Checks Outside Vehicle 31
Safety Tips 31
Schedule, Maintenance 33
Selection Of Coolant (Antifreeze) 42, 43
Shifting 11
Automatic Transmission 11
Specifications
Fuel (Gasoline) 43
Oil 43
Synthetic Engine Oil 39

T
Tires
Changing 32
Wheel Nut Torque 41
Towing 16
Guide 16
Recreational 16
Weight 16
Towing Behind A Motorhome 16
Trailer Towing 16
Trailer Towing Guide 16
Trailer Weight 16
Transmission
Shifting 11

V
Vehicle Maintenance 39
Viscosity, Engine Oil 39


DODGE
DURANGO
SRT



SCAN TO ACCESS YOUR
VEHICLE'S VIDEO PLAYLIST

©2021 FCA US LLC. ALL RIGHTS RESERVED. TOUS DROITS RÉSERVÉS. DODGE IS A REGISTERED TRADEMARK OF FCA US LLC OR FCA CANADA INC., USED UNDER LICENSE. DODGE EST UNE MARQUE DÉPOSÉE DE FCA US LLC OU FCA CANADA INC., UTILISÉE SOUS LE PERMIS. APP STORE IS A REGISTERED TRADEMARK OF APPLE INC. GOOGLE PLAY STORE IS A REGISTERED TRADEMARK OF GOOGLE.

P68565788AA
FIRST EDITION